

HEAVY-DUTY WORKSTATIONS

Workbench 1000 Series

UPPER ADD ONS *(requires lightframe)*

LED Light	Paper Tray
Fan Kit	Parts Bin
Pegboard Kit	Small PC Hanger
Whiteboard Kit	Monitor Mount
Whiteboard/Pegboard Kit	Basic Monitor Arm
Tool Trolley available with Tool Balancer	Ergo Arm Tray
Roll Holder	Single Monitor
Upper Flow Rack Shelf	Dual Monitor
Tool Bin Bracket	Monitor/Keyboard
Upper Shelf (12" or 24")	Keyboard Only
	Tool Bins

OTHER ADD ONS *(lightframe not required)*

Drawer Kits Large, Small or Combo	PC Tower Hanger
Lower Shelf	Power Strip
Lower Pegboard	



LIFT CAPACITY

1000 lbs

STANDARD SIZES

Starting height: 32.5" | 36.5"

Widths: 48"-72" (12" increments)

Depths: 30" | 36"

ADJUSTMENT

12" or 16" vertical adjustment
at .25" per second

Actuators provide heavy-duty lift power

Available with electric
height-adjustment only

Simple or programmable control switch

STANDARD COLORS


VOC-free powder coating

	RAL 9003 - Signal White
	RAL 7037 - Dusty Grey
	OB07 - Matte Black

STANDARD SURFACES

 Butcher Block

 HPL Black

 HPL White

electrostatic discharge (ESD) options

STABILITY

Rigid cold-rolled steel construction

Anti-vibration mounts
with 6" retractable casters


CUSTOMIZATION

Custom Sizes, Color
and Branding available

*Shown with Lightframe, Pegboard, Fan Kit,
and Tool Bin Ergo Arm*

TECHNICAL

HEAVY-DUTY WORKSTATIONS

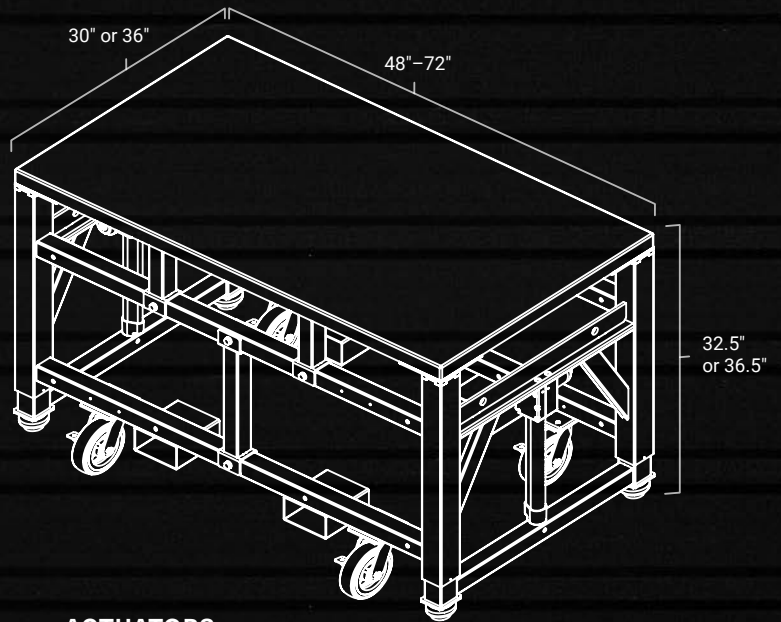

MIGHTY MOUNTS

Anti-Vibration, Leveling
3 in Diameter
3/8-16 Thread
8Hz Natural Frequency
700 lbs Capacity Each

CASTERS

6 in Swivel With Brake
(Rigid Casters Optional)
Polyurethane -
Shore A 80 Durometer
1100 lbs Capacity Each

ACTUATORS

Custom Designed 12 in or 16 in Linear Actuators (Bolt-On)
IP66 Rated
Speed - 6.3 mm/Second
(1/4 in/Second) @ Zero Load
3.5 mm/Second
(9/64 in/Second) @ Max Load
1000 lbs Maximum Weight Capacity (Evenly Distributed)
Mechanical Brake Spindle Nut For Redundant Protection



No Lightframe



With Lightframe

ELECTRICAL SPECS

Power Supply 120VAC 10% / 60Hz
Standby Power Consumption < 0.3 Watts
Operating Temperature 0-35° C
Protection Class IP20
Maximum Power Output 216VA/24V

2 Actuator System with 1 Control Box:

Maximum Lift Capacity 1000LBS (544kg / 5338N)
Adj. Range 12IN
Maximum Input Current 5A
Maximum Duty Cycle 10% (2 MIN ON / 18 MIN OFF)

Specifications may vary based on system configuration and workload.